


L430X – 4.3” Arrival Lantern

Installation manual

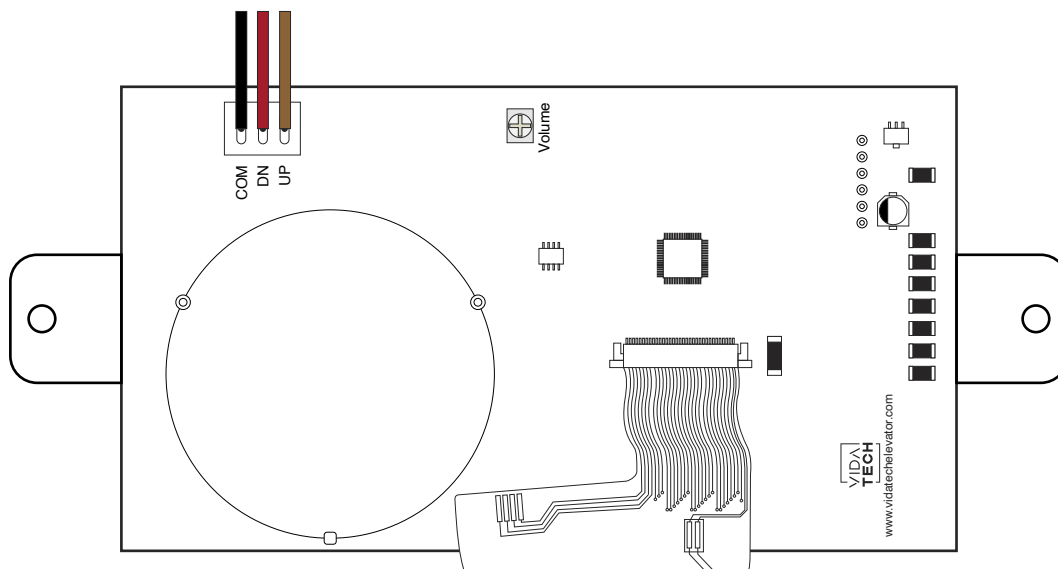

- Supply must be between 16VDC to 28VDC.
- Volume adjustable with the potentiometer.
- Negative or positive common.